






STRAP HOOKS



Hooks for Straps

- A variety of yellow chromated hooks for webbing
- Design factor 3:1

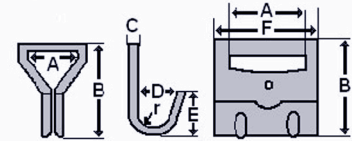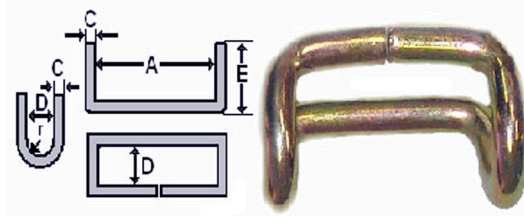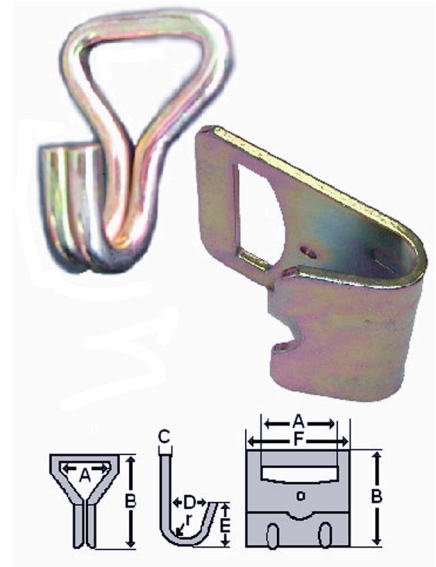

Type	Size	WLL (lbs)	Dimensions (inches)						Vanguard Code
			A	B	C	D	E	F	
Narrow Wire Hook	1	800	1.062	2.375	0.250	1.000	1.250		3703 0006
Narrow Wire Hook	2	1,660	2.000	3.250	0.312	1.062	1.312		3703 0009
Narrow Wire Hook	2	3,335	2.000	3.250	0.500	1.187	1.312		3703 0008
Closed Hook	2	1,000	2.250	1.000	0.375	0.940			3703 0203
Flat Hook	2	3,335	1.750	3.500	0.187	0.450	0.875	2.250	3703 0015
Flat Hook	3	5,000	2.750	3.875	0.187	0.780	1.750	3.625	3703 0005

Note:

WORKING LOAD LIMITS ARE FOR STRAIGHT IN-LINE PULLS ONLY

Warning:


Do not use straps that are cut, frayed or otherwise damaged
 Protect straps from sharp corners or edges with corner protectors
 The total mass/weight of the load shall not exceed the aggregate working load limit of all tie-downs
 Keep buckles clean and lubricated

STRAP HOOKS



Vinyl Covered Hooks

- Strong S-hooks coated with black vinyl
- For use where hooks are touching delicate surfaces
- Available in two sizes with two working load limits
- Design factor 3:1



Type	WLL (lbs)	Dimensions (inches)							Vanguard Code
		A	B	C	C ¹	D	E	r	
S-Hook 1, Vinyl Coated	600	1.687	0.937	0.312	0.375	4.125	1.500	0.375	3703 0018
S-Hook 2, Vinyl Coated	830	2.000	0.937	0.437	0.500	5.000	2.000	0.500	3703 0019

Note:

WORKING LOAD LIMITS ARE FOR STRAIGHT IN-LINE PULLS ONLY

Warning:

Do not use straps that are cut, frayed or otherwise damaged
 Protect straps from sharp corners or edges with corner protectors
 The total mass/weight of the load shall not exceed the aggregate working load limit of all tie-downs
 Keep buckles clean and lubricated